

Technical data :	
Rated voltage	48 V AC/DC
Rated current	4 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-25...80 °C

Protection :	
Protection degree	IP67

M12 straight male connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Peripheral shielding connected to locking nut/screw	


M12 straight female connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Peripheral shielding connected to locking nut/screw	

Shielded cable characteristics :	
Sheath material	Halogen free PUR
Wire structure	5 x 0,34 mm ²
Conductor class	5
Sheath diameter	6,5 mm


Tin-plated copper braided shielding covering rate: 85%	
Flame resistance according to	IEC 60332-1-2
Oil resistance according to	EN 50363 & IEC 60811-2-1
Drag chain suitable	

Cable length :	
L standard lengths	1 m / 2 m / 5 m / 10 m
Other length	On request
Reference : replace «...» by length required: 1/2/5/10	

Accessories (included) :	
2 label holders	

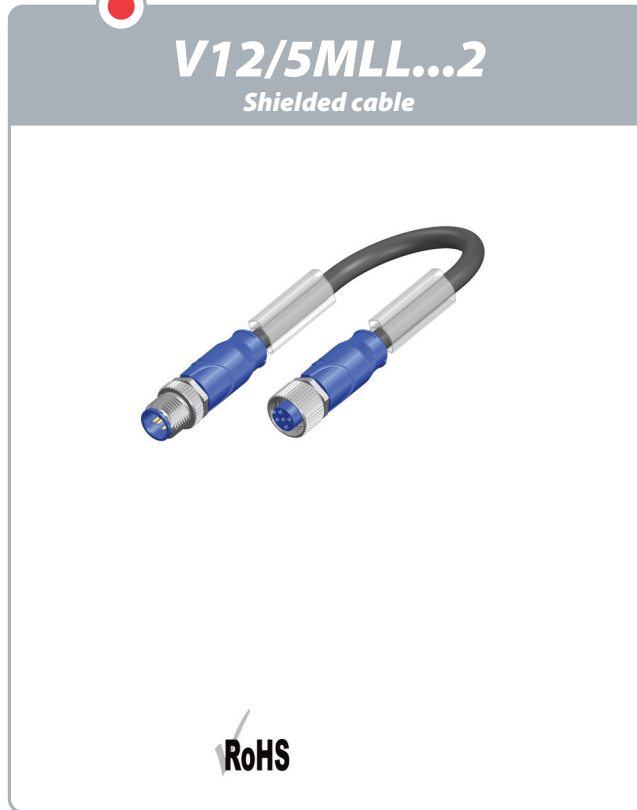

Dimensions :

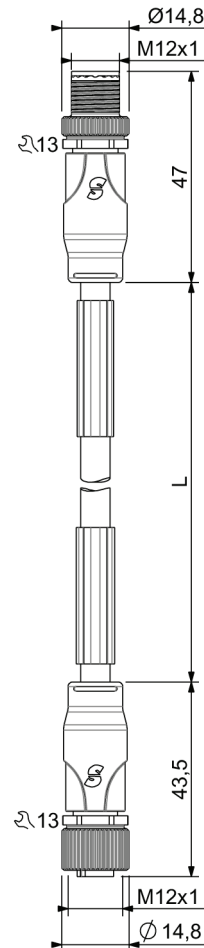

Wiring diagram :

