

Technical data :	
Operating voltage	10...30V DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...70 °C

Protection :	
Protection degree	IP67

M12 angled male connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

M12 angled female connector (LEDs) :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
LED(s) colour	LEDs (YE / RD / GN)
Compatibility type	PNP
Current consumption per LED	< 5 mA


Status indication :	
Signal (2)	Red LED
Signal (4)	Yellow LED
Power	Green LED

Cable characteristics :	
Sheath material	Halogen free PUR
Wire structure	5 x 0,34 mm ²
Conductor class	6
Sheath diameter	5,65 mm
Minimal sheath (wall) thickness	> 1 mm
Cable construction according to	UL-AWM Style 20549/10493
Halogen free cable according to	DIN VDE 0472 Part 815
Cable silicone free and LABS free according to	PV 3.10.7
Flame resistance according to	UL FT2
Oil resistance according to	UL 758
Admissible torsion	+/- 360 °/ m
Drag chain suitable	
Minimum static bending radius	: 5 x Ø
Minimum dynamic bending radius	: 10 x Ø
Resistant to weld splatters	

Cable length :	
L length	3 m
Other length	On request


Accessories (included) :	
2 label holders	

Wiring diagram :

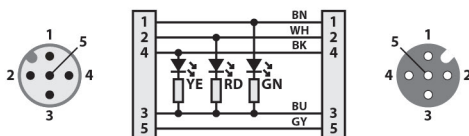

S12/5MCP3R34VG

Suitable for welding application



Dimensions :

