

Technical data :

Rated voltage	24 V DC
Rated current	500 mA
Ambient temperature range	-25...70 °C

Protection :

Protection degree	IP67
-------------------	------

M12 straight male connector :

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Peripheral shielding connected to locking nut/screw	

M12 straight male connector :

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Peripheral shielding connected to locking nut/screw	

Shielded cable characteristics :


Type of cable	PROFINET CAT.5 (10-100 Mbit/s)
Suitable for EtherCAT and EtherNet/IP applications	
Sheath material	PVC
Wire structure	2 x 2 x AWG22 (PE)
Conductor class	AWG22/7 (Ø 1,5 mm)
Sheath diameter	6,5 mm
Conductor resistance	< 120 Ω/km (loop)
Characteristic impedance	100 Ω @ 100 MHz
Insulation resistance	500 MΩ*km
Tin-plated copper braided shielding covering rate: 85%	
Flame resistance according to	UL1685 (CSA FT 4)
Shielding material according to DIN EN 13602	Cu-ETP-A...-B

Cable length :


L length	50 m
Other length	On request

V12D/4DLM505P


Field bus



Dimensions :

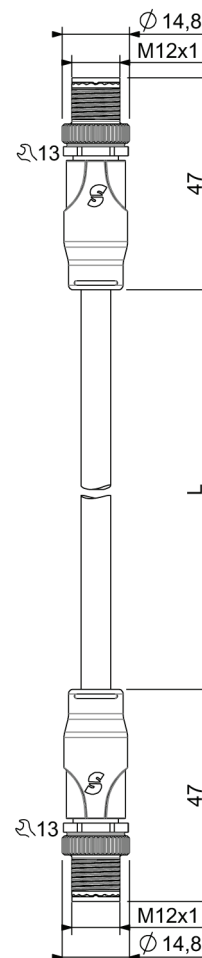

Wiring diagram :



For uses in particularly harsh environments: Please enquire

We reserve the right to modify all or part of characteristics of our products without warning.