

Technical data :	
Rated voltage	24 V DC
Rated current	500 mA
Ambient temperature range	-25...70 °C

Protection :	
Protection degree	IP67

M12 straight male connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Peripheral shielding connected to locking nut/screw	


M12 straight male connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Peripheral shielding connected to locking nut/screw	

Shielded cable characteristics :	
Type of cable	PROFINET CAT.5 (10-100 Mbit/s)
Suitable for EtherCAT and EtherNet/IP applications	
Sheath material	Halogen free PUR
Wire structure	2 x 2 x AWG22 (PE)
Conductor class	AWG22/19 (Ø 1,5 mm)
Sheath diameter	6,5 mm
Conductor resistance	< 120 Ω/km (loop)
Characteristic impedance	100 Ω @ 100 MHz
Insulation resistance	500 MΩ*km

Tin-plated copper braided shielding
 covering rate : 85%
 Shielding material according to DIN EN 13602 Cu-ETP-A...-B
 Cable resistant to high torsion loads. Tested for more than one million bending cycles combined with 180° left/right movement over 1 metre
 Minimum bending radius : 5 x outer diameter
 Flame resistance according to IEC 60332-1-2
 Halogen free cable according to DIN VDE 0472 Part 815


Cable length :	
L standard lengths	1 m / 2 m / 5 m / 10 m
Other length	On request
Reference : replace «...» by length required: 1/2/5/10	

Wiring diagram :



V12D/4DLM...4P

Field bus

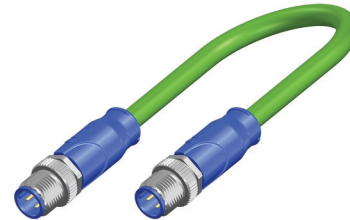

RoHS

Dimensions :

